キット部品取り付け説明書

キットの各燃料ホース交換はカワサキ正規取扱店で交換する事をお奨めいたします。

モデル:ZX1100-C 用(イギリス仕様モデル以外)

燃料ホースキット:99999-0061

開封時に部品の内容をご確認ください。

番号	部品名称	部品番号	個数	備考
1	燃料ホース	92190-1117	1	
2	燃料ホース	92190-1155	1	
3	燃料ホース	92192-0427	1	
4	燃料ホース	92192-0489	1	
5	燃料フィルタ	49019-1055	1	
6	クランプ	92170-1201	3	
7	クランプ	92170-1938	2	
8	クランプ	92170-1051	1	
9	クランプ	92037-1181	2	

交換要領

● 燃料タンクを燃料コックがついたままで取り外す(サービスマニュアル英文補足版部品番号 99924-1127 を参照する)。

● エアクリーナハウジング、キャブレタを取り外す(サービスマニュアル英文補足版を参照する)。

● 車両及びタンクに現在付いている各燃料ホース、フィルタを取り外す(サービスマニュアル英文補足版を参照する)。

○ 燃料ポンプは取り外さない。

⚠警告

ガソリンは非常に燃えやすく、条件によっては爆発の危険がある。周囲を充分換気し、火気を遠ざける。パイロットライト付き機器も使用禁止。また喫煙してはならない。エンジンは停止。燃料洩れに気を配り受け皿、布を用意し、こぼれた燃料はすぐに残らず拭き取ること。

● キットの各燃料ホース、フィルタを取り付ける(サービスマニュアル英文補足版を参照する)。

○ 取り付けの際、ペンチやプライヤなどで燃料ホースを傷つけたり、無理な力を加えないように注意深く作業をする。


○ 燃料ホース[A]は接続部にしっかりはめこみ、リブ[C]を越えてクランプ[B]を取り付ける。また、クランプの爪部は他部品に接触しない位置にする。
1～2 mm [D]

○ 燃料ホースの端は接続部の縁[E]まで通すか、側面[F]にできるだけ近くまで押し込む。

○ 燃料ホースを通すときは、よじれたり、伸びたりしないように注意する。

● 取り外した部品を組み立てる。

● エンジンを始動し、燃料漏れがないか点検する。

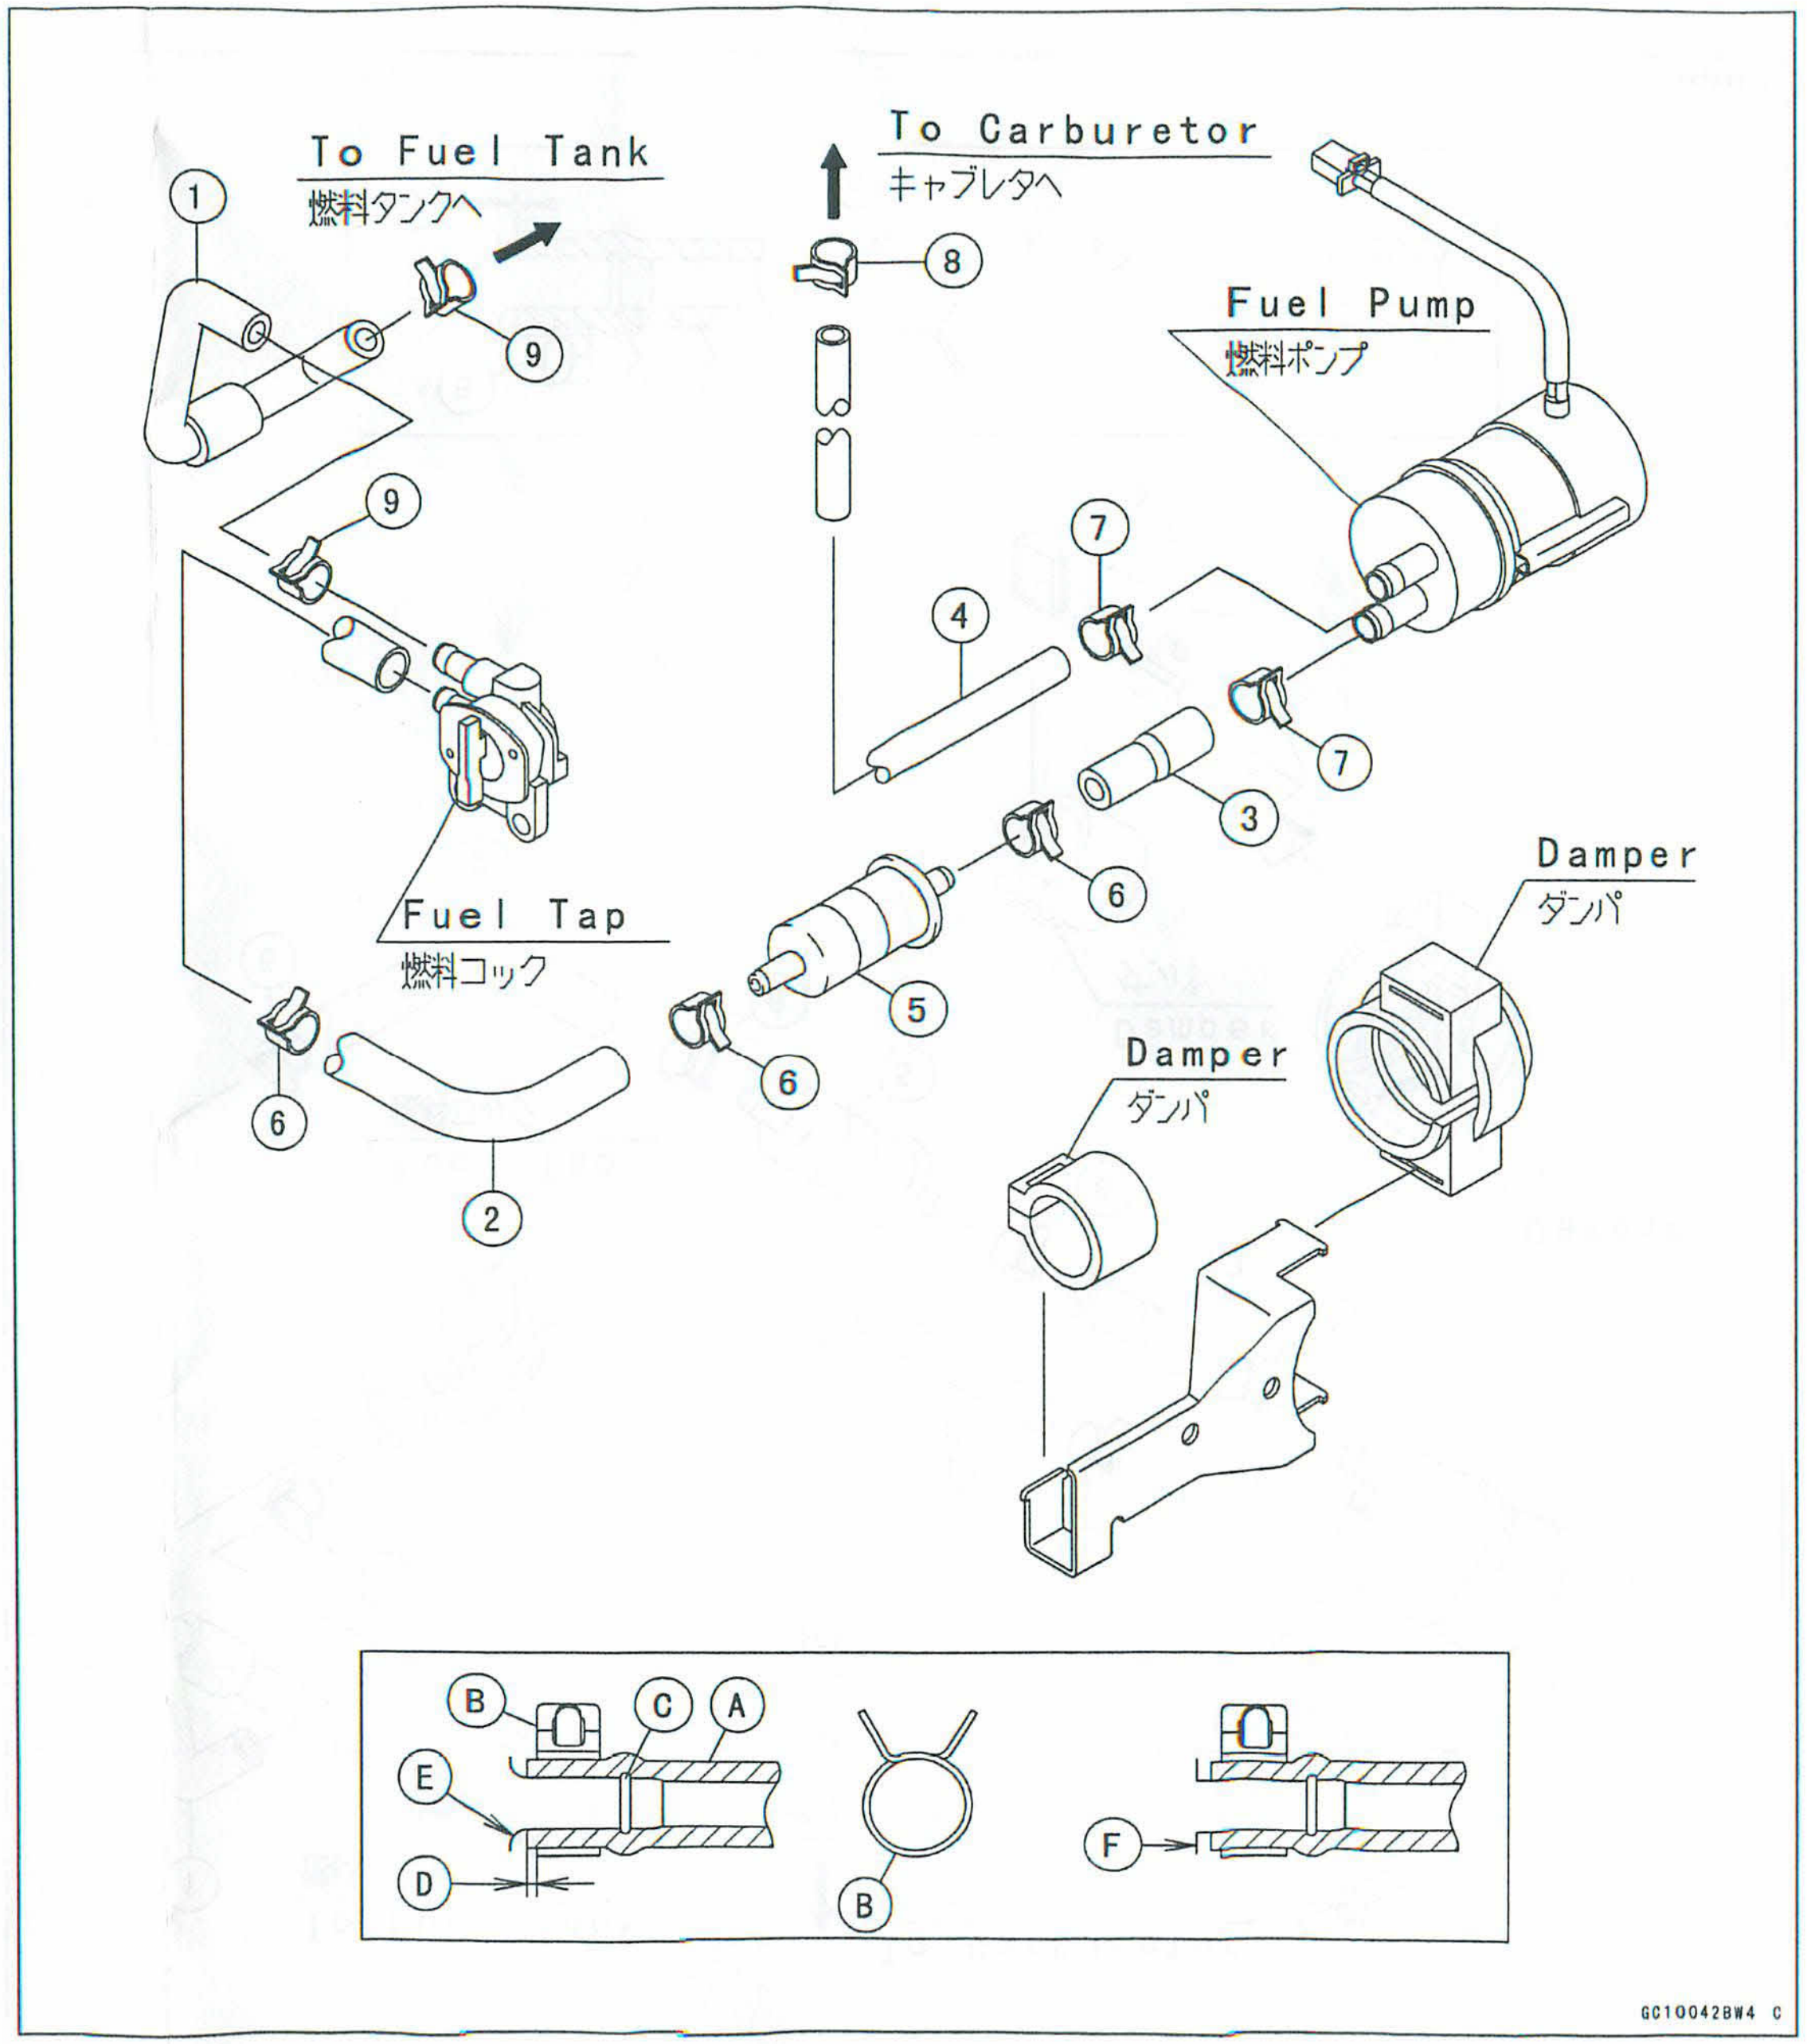

Kit Part Installation Instruction

Instruction P/No. 99929-1914-02

Have the fuel hose replaced by an authorized Kawasaki dealer.
Model: ZX1100-C (Except U.K. Model)
Fuel Hose Kit: 99999-0061

The fuel hose kit consists of the components below. Confirm the contents in the box.

No.	Component Name	Part No.	Qty	Remark
1	Fuel Hose	92190-1117	1	
2	Fuel Hose	92190-1155	1	
3	Fuel Hose	92192-0427	1	
4	Fuel Hose	92192-0489	1	
5	Fuel Filter	49019-1055	1	
6	Clamp	92170-1201	3	
7	Clamp	92170-1938	2	
8	Clamp	92170-1051	1	
9	Clamp	92037-1181	2	

Replacement Procedure

- Remove the fuel tank with the fuel tap (refer to the Service Manual Supplement P/No 99924-1127).
- Remove the air cleaner housing and carburetor (refer to the Service Manual Supplement).
- Remove the fuel hoses and fuel filter (refer to the Service Manual Supplement).
- ○ Do not remove the fuel pump.

⚠WARNING

Gasoline is extremely flammable and can be explosive under certain conditions. Turn the ignition switch OFF. Do not smoke.
Make sure the area is well ventilated and free from any source of flame or sparks; this includes any appliance with a pilot light.

- Install the fuel hoses and fuel filter of kit(refer to the Service Manual Supplement).
- ○ When installing the fuel hoses, do not use the pliers for preventing the hose damage and be fully careful not to give the excessive forces to the hose on working.
- ○ Fit the fuel hose [A] onto the fitting fully and install the hose clamp [B] beyond the raised rib [C]. Do not tach the claw portion of clamp toother part.
  1 ~ 2 mm (0.0039 ~ 0.0078 in) [D]
- ○ The hose end should reach the fillet [E] or as near as possible to the wall [F].
- ○ Be sure to route the hoses so that they will not be kinked or stretched.
- Install the removed parts.
- Start the engine and check fuel leakage from the fuel line.

